


## **COMBI LUX NYLON BRISTLE INSERT - Commercial Entrance Matting**

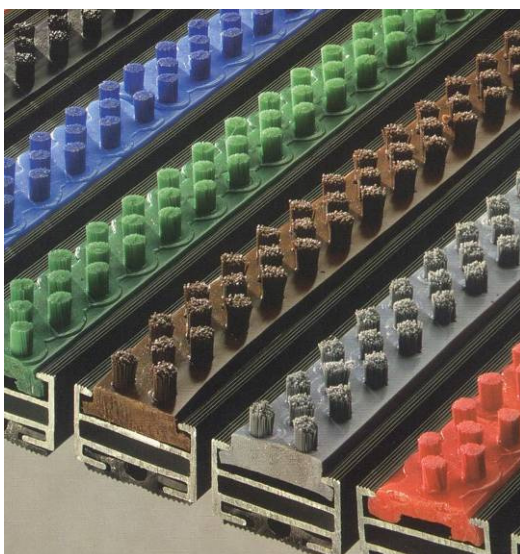

| Specifications & Features  |                          |                                   |                  |
|--|--------------------------|-----------------------------------|------------------|
| Recycled aluminium and infill strip construction                             |                          | Aluminium sections rubber jointed |                  |
| European Design  | Removable for Easy Clean |                                   | 6 Colour Options |
| Durable  | Rubber Backed            | Silent to Walk on                 |                  |
| Nylon Bristle insert surface removes small stones and gravel                 |                          |                                   |                  |
| Designed for surface mounting where no well has been provided                |                          |                                   |                  |
| Designed for heavy foot traffic and can be installed flat or on a slope ramp |                          |                                   |                  |
| Supplied with aluminium L angle recess or surface mounted ramp frames        |                          |                                   |                  |
| Proudly NZ made by Burgess Matting & Surfacing (established 1951)            |                          |                                   |                  |

### **Maintenance:**

Vacuum daily to remove dust and dirt.  
Periodically remove the rollable Combi-Lux matting from the matwell and clean with warm water and mild detergent. Rinse thoroughly afterwards.  
Remove all dirt and debris from the matwell and replace the Combi-Lux when dry.  
For further cleaning information please refer to the manufacturer.

## **COMBI LUX BRISTLE INSERT Specification Sheet**

The mat shall be Burgess Combi-Lux entrance system with Bristle inserts


|  |  |
|--|--|
| Bristle Insert Colour  |  |
| Dimension Left to Right (In mm)  |  |
| Front to Back (In mm)  |  |
| Frame Type Required (Choose either L angle recess or surface mount ramp frame) |  |
| Size of the above is –<br>(Choose and specify either overall or mat only size) |  |

### **Nylon Bristle Insert Colour Options 24mm\***

3301 Black    3302 Grey    3303 Brown    3304 Blue    3305 Red    3306 Green

\* Profile height, including insert, excluding frame

### **COMBI LUX FRAME INSTALLATION METHODS**

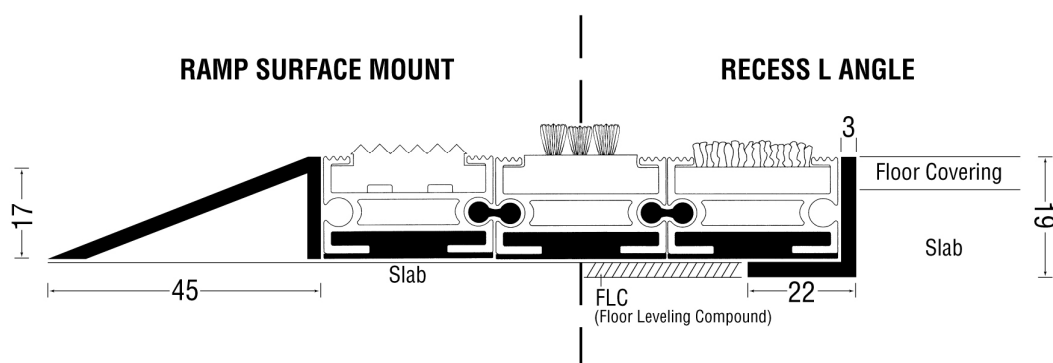

NB: When specifying Combi-Lux matting to enhance appearance, calculate the front to back dimensions to the nearest full bar in increments of 40mm, allowing 4mm either side for the frame.



**Ramp Frame**



**Recess Frame**