


COMBI SLIMLINE RUBBER SCRAPE INSERT - Commercial Entrance Matting

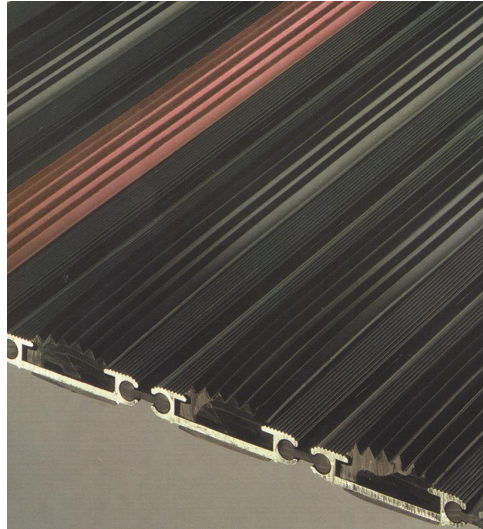

Specifications & Features		
Recycled aluminium and infill strip construction		Aluminium sections rubber jointed
European Design	Removable for Easy Clean	6 Colour Options
Durable	Rubber Backed	Silent to Walk on
Rubber scrape infill surface finish removes small stones and gravel		
Designed for surface mounting where no well has been provided		
Designed for heavy foot traffic and can be installed flat or on a slope ramp		
Supplied with aluminium L angle recess or surface mounted ramp frames		
Proudly NZ made by Burgess Matting & Surfacing (established 1951)		

Maintenance:

Vacuum daily to remove dust and dirt. Periodically remove the rollable Combi-Slimline matting from the matwell and clean with warm water and mild detergent. Rinse thoroughly afterwards. Remove all dirt and debris from the matwell and replace the Combi-Lux when dry. For further cleaning information please refer to the manufacturer.

COMBI SLIMLINE RUBBER SCRAPE INSERT SPECIFICATION SHEET

The mat shall be Burgess Combi-Slimline entrance system with _____ Rubber Scrape inserts.

Rubber Scrape Colour	
Dimension Left to Right (In mm)	
Front to Back (In mm)	
Frame Type Required (Choose either L angle recess or surface mount ramp frame)	
Size of the above is – (Choose and specify either overall or mat only size)	


Rubber Scrape Insert Options 15mm*

4401 Black 4402 Grey 4403 Brown 4404 Blue 4405 Red 4406 Green

* Profile height, including insert, excluding frame.

Installation:

COMBI SLIMLINE FRAME INSTALLATION METHODS

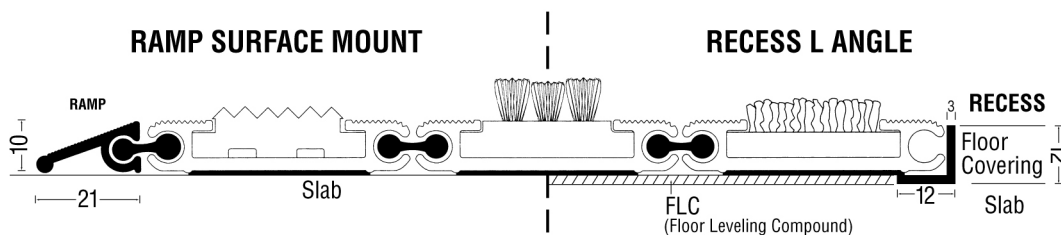

NB: When specifying Combi-Slimline matting to enhance appearance, calculate the front to back dimensions to the nearest full bar in increments of 45mm, allowing 4mm either side for the frame.



Ramp Frame



Recess Frame