

Nuway Tuftiguard Tile – Entrance Matting



Specifications & Features		
Available in 500 x 500 mm size tile only		
Durable	Non Slip	Quick Drying
Removable for easy cleaning		Designed to remove dirt & small stones
European Design		Closed Mat Construction
Ideal for entranceways with multiple access from different directions		
Recycled aluminium and buffed rubber strip construction		
The only reversible entry mat system available on the NZ market		
Supplied with aluminium L angle recess or surface mount ramp frames		
Designed for a recess or well installation but can be surface mounted if required		
Proudly NZ made by Burgess Matting (Established 1951)		

Maintenance:

Vacuum daily to remove dust and dirt. Periodically remove the mat from the matwell and clean with warm water and mild detergent. Rinse thoroughly afterwards. When replacing the Nuway mat, turn it over to equally wear as this will double the life of the mat. Remove all dirt and debris from the matwell and replace the Nuway mat when dry. For further cleaning information please refer to the manufacturer.

NUWAY TUFTIGUARD TILE Specification Sheet

The mat shall be a Burgess Nuway Tuftiguard Tile entrance system with aluminium inserts.

Dimension Left to Right (In mm)	
Front to Back (In mm)	
Frame Type Required (Choose either L angle recess or surface mount ramp frame)	
Size of the above is – (Choose and specify either overall or mat only size)	


Strip Insert Options:

19mm* Mill finish aluminium only

* Profile height, including insert, excluding frame.

Installation:

NUWAY MAT FRAME INSTALLATION METHODS

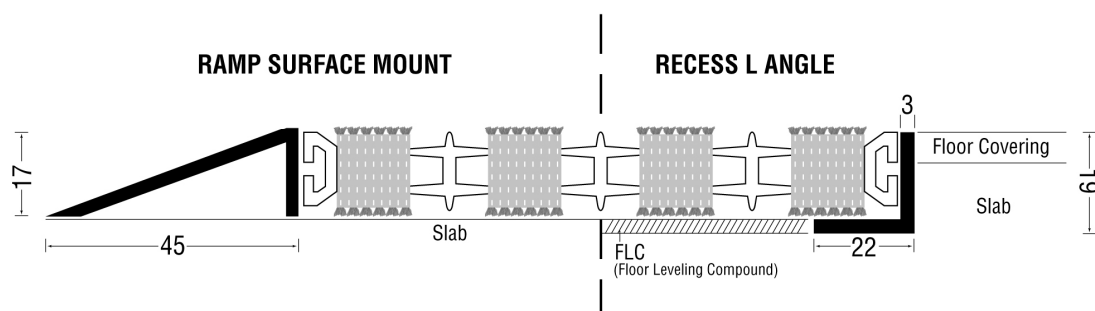

Recess Frame



Ramp Frame