


## **COMBI LUX CARPET INSERT – Commercial Entrance Matting**

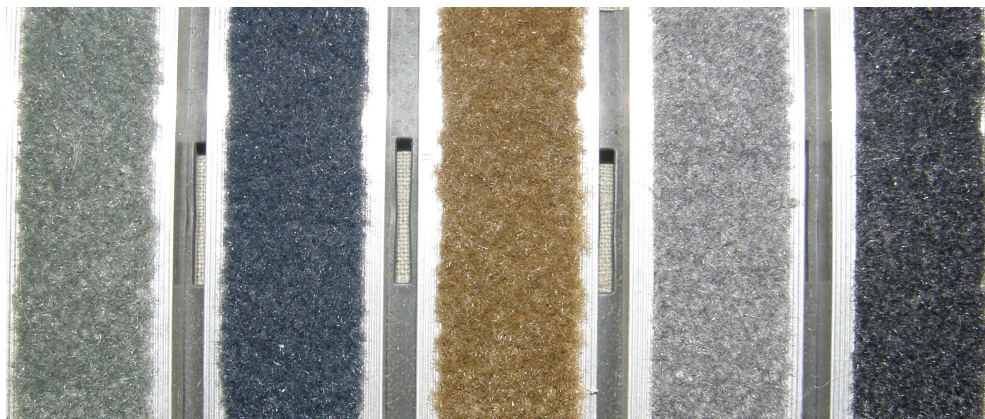

Specifications & Features		
Aluminium & Carpet Infill Strip Construction	Aluminium Sections Rubber Jointed	
European Design	Removable for Easy Clean	
Box Section Aluminium Strips for Strength	Silent to Walk On	Durable
Durable	Rubber Backed	
Designed for recess or well installation or can be surface installed if required		
Designed for heavy foot traffic and can be installed flat or on a slope ramp		
Supplied with aluminium L angle recess or surface mounted ramp frames		
Proudly NZ made by Burgess Matting & Surfacing (established 1951)		

### **Maintenance:**

Vacuum daily to remove dust and dirt. Periodically remove the rollable Combi-Lux matting from the matwell and clean with warm water and mild detergent. Rinse thoroughly afterwards. Remove all dirt and debris from the matwell and replace the Combi-Lux when dry. For further cleaning information please refer to the manufacturer.

## COMBI LUX CARPET INSERT SPECIFICATION SHEET

### Specification:

The mat shall be a Burgess Combi-Lux entrance system with \_\_\_\_\_ carpet inserts.


Carpet Insert Colour	
Dimension Left to Right (In mm)	
Front to Back (In mm)	
Frame Type Required (Choose either L angle recess or surface mount ramp frame)	
Size of the above is – (Choose and specify either overall or mat only size)	

### Carpet Insert Options 20mm\*

6601 Ash Black      6602 Steel Grey      6603 Golden Brown  
6604 Arctic Blue      6605 Sea Green

\* Profile height, including insert, excluding frame.

### COMBI LUX FRAME INSTALLATION METHODS

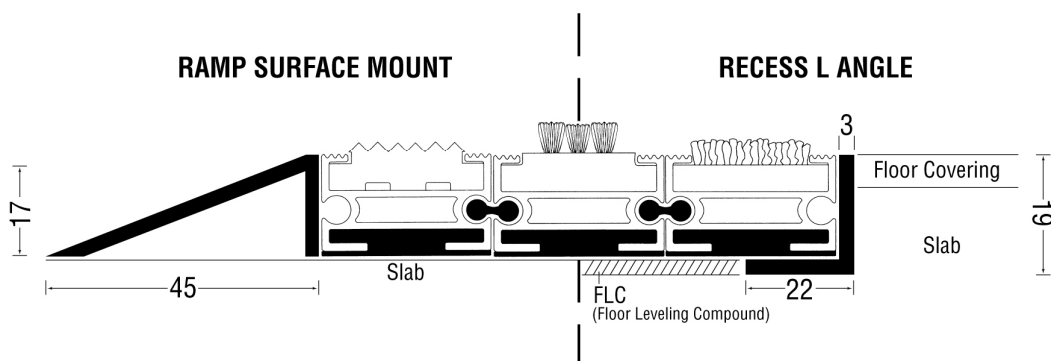

NB: When specifying Combi-Lux matting to enhance appearance, calculate the front to back dimensions to the nearest full bar in increments of 35 mm, allowing 4mm either side for the frame.



**Ramp Frame**



**Recess Frame**