

BURGESS ECO TILES



SUPER TOUGH FLOORING TILES

FOR A DURABLE ULTRA MODERN FLOORING SOLUTION

The Contemporary Choice



Perfect for high traffic areas like entrance ways, shopping complexes, airports, hospitals and schools.

The slip resilient spike proof material is also ideal for areas such as golf shops, ski lodges, sports complexes and locker rooms.

Burgess Eco Tile flooring tiles can be specified for covered exterior installations where the weather can affect the flooring. Even when wet, the tiles retain their skid resistant qualities to provide sure footing in the worst conditions. The superior traction properties make them ideal for ramps, walkways and stairs.

TECHNICAL SPECIFICATIONS

Coefficient of Friction (slip resistance)	Dry >1 Wet 0.98 (per ASTM F1677) Exceeds ADA recommended ratings of .60 for flat surfaces and .80 for ramps.
Radiant Panel (Flammability)	Radiant panel M# (per NFP 92-506)
Abrasion Resistance	Wear index 1/g=53.9
Tensile Strength	Longitudinal >1500psi

INSTALLATION

Apply adhesive to base to allow for repositioning of the tile during installation.


Endurance flooring tiles may be installed on any smooth, dry interior or exterior surface.

For exterior installations, newly installed products should not be exposed to any moisture for a period of 72-96 hours to permit the adhesive to dry properly.

These heavy duty, rugged tiles are made from recycled truck and airplane tyres using state of the art recycling technology. Burgess Eco Tile flooring tiles are low maintenance with a durable, slip resistant ribbed construction.

Comfortable to walk on and tough enough to handle heavy wear.

The rugged brushed nylon surface complements practically any design scheme with simple, fast installation on either flat surfaces or in recessed matwells.

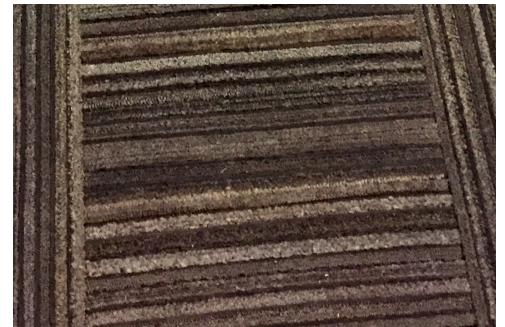

SPECIFICATIONS

Usage	Heavy duty flooring tiles
Description	100% recycled tyre with reinforced base
Surface	Buffed nylon
Backing	Non-flammable solid adhesive base
Dimensions	292 x 292 x 9mm
Weight	9.88kg/m ²
Warranty	5 year 'normal wear' limited warranty

Chemical Resistance

Acetic Acid 30%	Good
Butyl Alcohol	Good
Chromic Acid (dilute)	Good
Detergents	Good
Petroleum products	Not resistant
Hydrogen peroxide	Good
Nitric Acid	Not resistant
Sodium Hydroxide	Good
Sulfuric Acid	Good